



Advanced Calibration Standards: White, RGB, UV and IR

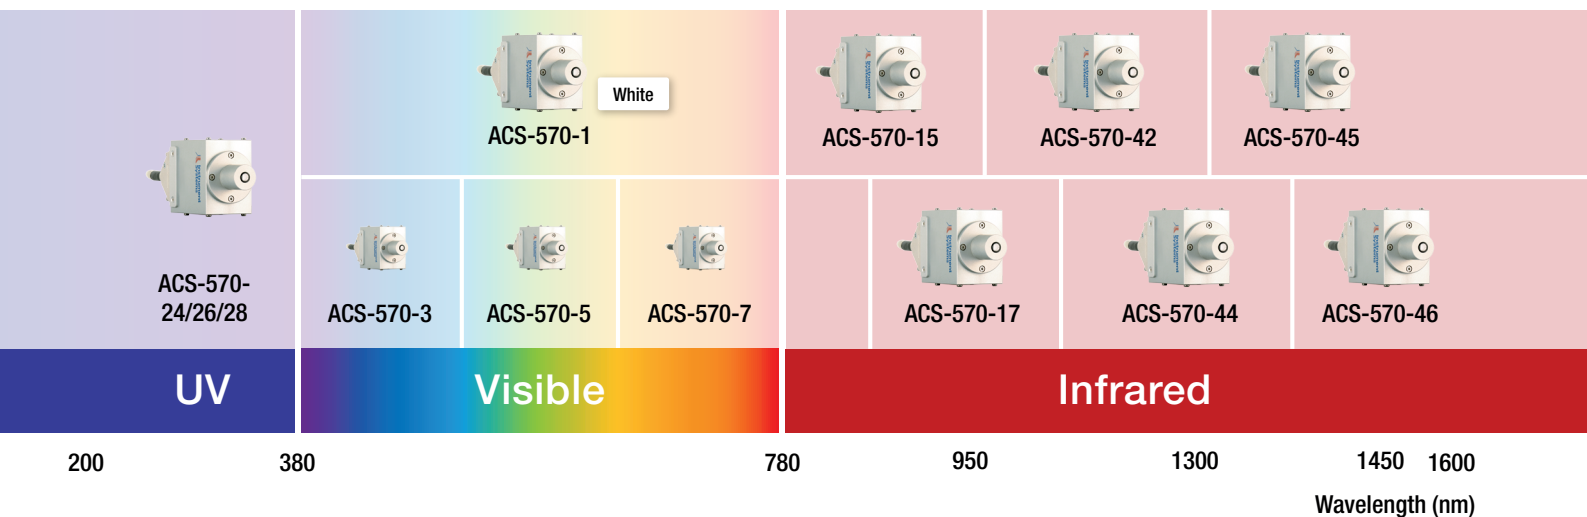

- » Reference values for radiant or luminous flux, averaged LED intensity and luminance traceable to PTB standards (in conformity with DIN ISO 17025)
- » Specification of color coordinates and dominant wavelength or color temperature if applicable
- » 0.2 % photometric stability over min. 100 operating hours for ACS standards with white LED

- » Maximum operational reliability by use with an ACU control unit
- » Extremely low measurements uncertainties

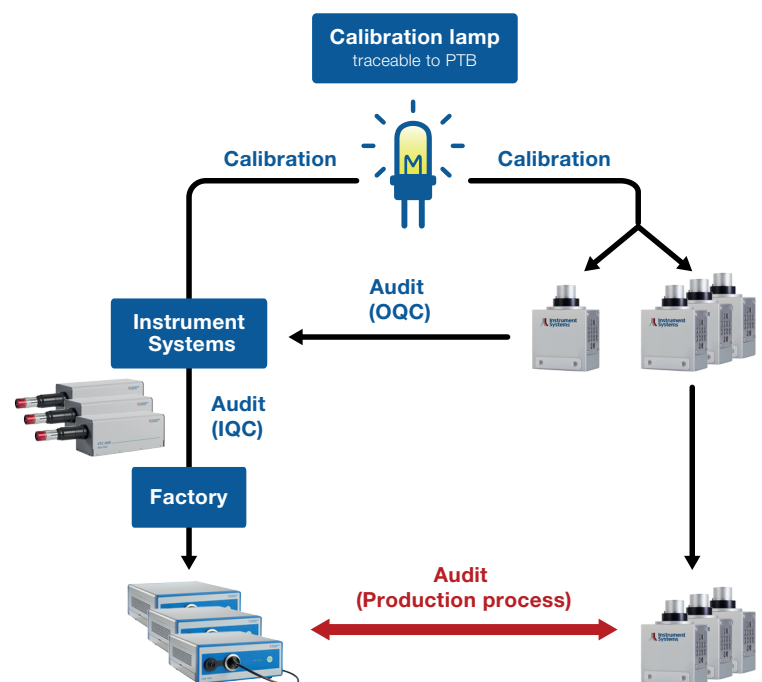

**Large global customer base,
worldwide service!**